

MODEL A281

2" Deep • Inverted "Y" Horizontal Blade • Sightproof Extruded Aluminum Louver

STANDARD MATERIALS AND CONSTRUCTION

- FRAME:** .081" thick; 6063-T6/T52 extruded aluminum alloy
- BLADES:** .064" thick; 6063-T6/T52 extruded aluminum alloy
- ASSEMBLY:** Mechanically fastened
- SCREEN:** 1/2" x .051" flattened aluminum birdscreen
- FINISH:** Mill

OPTIONS


- Finish - Baked Enamel, Kynar, or Anodize
- Variety of Bird and Insect Screen
- Welded Construction
- Blank-off Panels

NOTES


1. "A" width and "B" height are opening dimensions. Louvers are provided approximately 1/2" undercut.
2. Shipping weight approximately 3.8 lbs./sq.ft.

LOUVER SIZES

Panels	Min Panel	Max Single Panel
A281	12"W x 12"H	60"W x 96"H

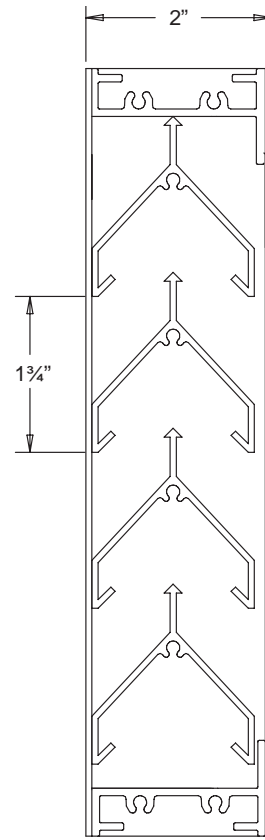

Section View

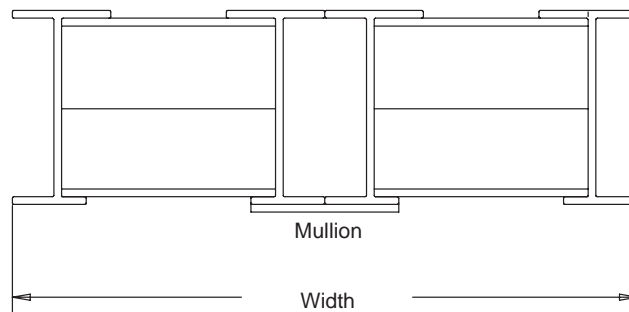

air balance



Dampers  Louvers
 UL Life Safety Products
 Division of Mestek
 Member of AMCA

MODEL A281

2" Deep • Inverted "Y" Horizontal Blade • Sightproof Extruded Aluminum Louver

Water Penetration: 850 fpm recommended maximum free area velocity
 Pressure Drop: 0.40 in.wg at 1000 fpm and 4430 scfm
 Free Area: 4.43 sq.ft. = 27.7% for 48"W x 48"H test size

Ratings do not include the effect of a birdscreen.

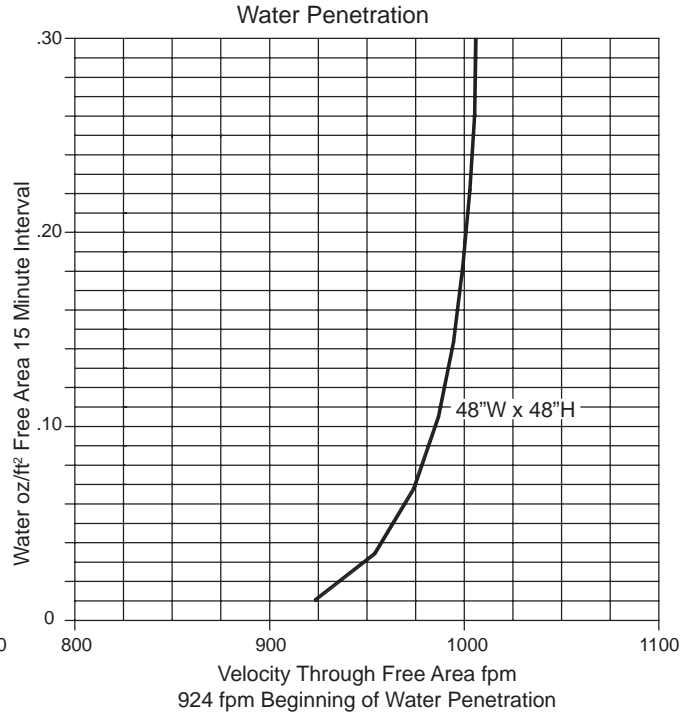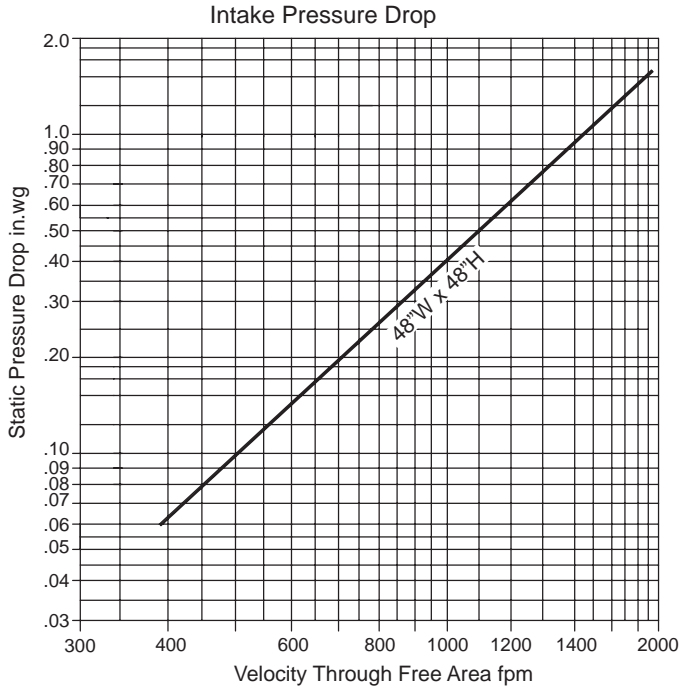

Free Area sq.ft.

		Width								
		12"	18"	24"	30"	36"	42"	48"	54"	60"
Height	12"	0.26	0.42	0.57	0.73	0.88	1.04	1.20	1.35	1.51
	24"	0.50	0.80	1.10	1.40	1.70	2.00	2.30	2.60	2.90
	36"	0.74	1.18	1.63	2.07	2.52	2.96	3.70	3.85	4.29
	48"	0.98	1.57	2.16	2.74	3.33	3.92	4.43	5.10	5.68
	60"	1.22	1.95	2.68	3.42	4.15	4.88	5.61	6.34	7.08
	72"	1.46	2.34	3.21	4.09	4.96	5.84	6.72	7.59	8.47
	84"	1.70	2.72	3.74	4.76	5.78	6.80	7.82	8.84	9.86
	96"	2.02	3.24	4.45	5.67	6.88	8.10	9.31	10.53	11.74

