

MODEL CE

Roof Curb Extension • Aluminum or Steel Curb

STANDARD MATERIALS AND CONSTRUCTION

Formed Aluminum Curb

FRAME: .063" thick aluminum alloy 3003-H14; All seams are fully welded and sprayed with protective coating

FINISH: Mill

Formed Steel Curb

FRAME: 18-GA galvanized steel; All seams are fully welded and sprayed with protective coating

FINISH: Mill

OPTIONS

Material Aluminum - Available in .081-.125 thick 3003-H14 alloy

Material Steel - Available in various gauges of galvanized, galvaneal or stainless

Platform Cap - A 3/4" plywood top with a metal cap fabricated of the same material as the product.

Wood Nailer - Factory installed wood nailer for equipment mounting is mechanically fastened to top perimeter.

Gasket - 1/4" thick polyurethane foam gasket can be installed, lining the entire top perimeter.

Insulation - Available with 1" or 2" semi-rigid insulation.



Access Panels - To provide a passageway to internal equipment, an access opening is cut and lined with a protective vinyl edge seal and the cover panel is mechanically fastened over the opening. Minimum height restrictions apply.

Louvered Vents - Provides airflow through the curb. Units are available with 6"W x 7/8"H louvered vents, with 4 per side. Minimum height restrictions apply.

Finishes - A wide selection of finishes include baked enamel, epoxy, or prime coat. Aluminum curb finishes include Kynar, clear or color anodize.

NOTES

1. "A" width, "B" length and "C" height are outside dimensions.
2. If either dimension exceeds 90", multi-section construction may be required.

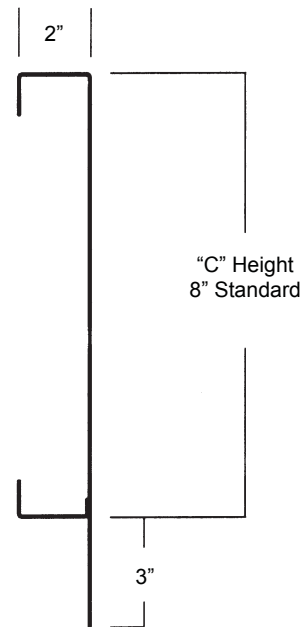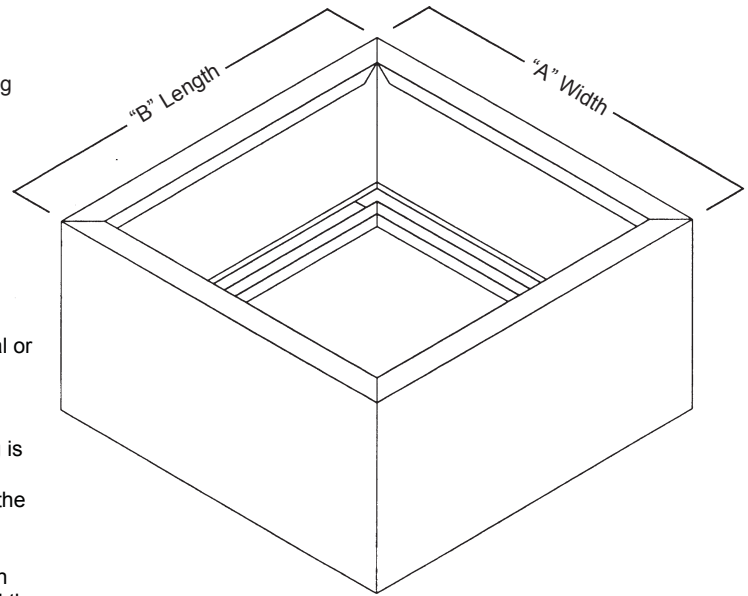

MODEL CE

Roof Curb Extension • Aluminum or Steel Curb

This page intentionally left blank.

air balance

Dampers  Louvers
UL Life Safety Products
Division of Mestek
Member of AMCA