

# MODEL FSA with FIBERGLASS DUCTWORK

1" Deep • For Fiberglass Duct Work • Duct Access Door

## STANDARD MATERIALS AND CONSTRUCTION

- FRAME:** 22-GA galvanized steel
- DOOR PANEL:** 24-GA galvanized steel
- INSULATION:** 1" fiberglass
- PRE-FORMED TABS:** 30-GA galvanized steel
- FINISH:** Mill

## OPTIONS


- Hinged or Cammed
- \*Sleeve for 1½" or 2" ductboard
- Viewports

## NOTES

1. "A" width and "B" height are opening dimensions.
2. On non-standard doors, the height is always the larger dimension.

## DOOR SIZES

Panels	Standard Sizes	Hinged FSA100_F Cams	Cammed FSA101_F Cams
FSA	6"W x 6"H	1	2
	8"W x 8"H	1	2
	10"W x 10"H	1	2
	12"W x 12"H	1	2
	14"W x 14"H	1	2
	16"W x 16"H	2	4
	18"W x 18"H	2	4
	20"W x 20"H	2	4
	24"W x 24"H	2	4

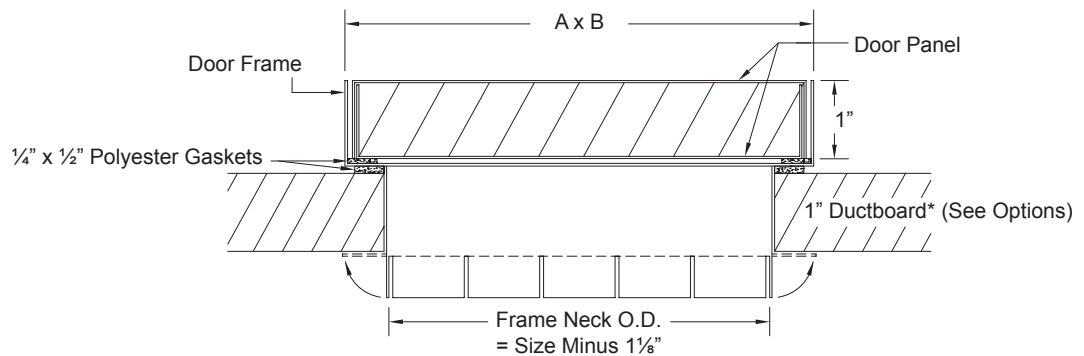

air balance

Dampers  Louvers  
UL Life Safety Products  
Division of Mestek  
Member of AMCA

# MODEL FSA with FIBERGLASS DUCTWORK

1" Deep • For Fiberglass Duct Work • Duct Access Door

This page intentionally left blank.

air balance

Dampers  Louvers  
UL Life Safety Products  
Division of Mestek  
Member of AMCA