

MODEL FSA

1" Deep • Duct Access Door

STANDARD MATERIALS AND CONSTRUCTION

- FRAME:** 22-GA galvanized steel
- DOOR PANEL:** 24-GA galvanized steel
- INSULATION:** 1" fiberglass
- PRE-FORMED TABS:** 22-GA galvanized steel
- FINISH:** Mill

OPTIONS


- .032" Aluminum with Plated Steel Cams and Strikers
- 24-GA Stainless Steel with Stainless Steel Cams and Strikers

NOTES


1. "A" width and "B" height are opening dimensions.
2. Standard construction to 4.5" Static Pressure.

DOOR SIZES


Panels	Standard Sizes	FSA100 Cams	FSA101 Cams
FSA	6"W x 6"H	1	2
	8"W x 8"H	1	2
	10"W x 10"H	1	2
	12"W x 12"H	1	2
	14"W x 14"H	1	2
	16"W x 16"H	2	4
	18"W x 18"H	2	4
	20"W x 20"H	2	4
	24"W x 24"H	2	4
	24"W x 36"H	3	6



FSA101



FSA100

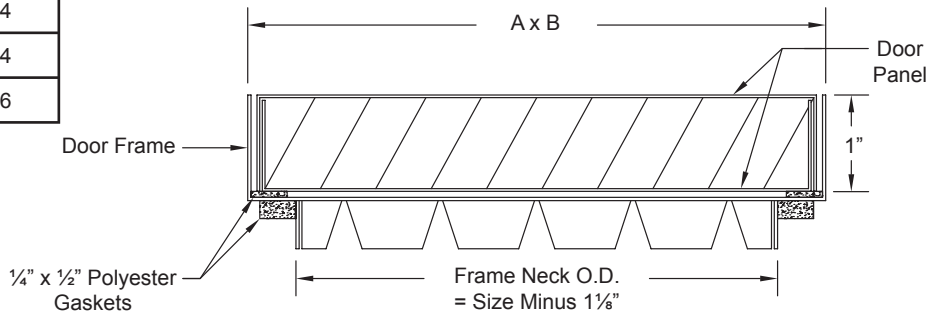

Dampers Louvers
UL Life Safety Products
 Division of Mestek
 Member of AMCA

MODEL FSA

1" Deep • Duct Access Door

This page intentionally left blank.

air balance

Dampers  Louvers
UL Life Safety Products
Division of Mestek
Member of AMCA