

MODEL S735C

7" Deep • Drainable Blade • Combination Stationary & Adjustable • Formed Steel Louver

STANDARD MATERIALS AND CONSTRUCTION

- FRAME:** 18-GA galvanized steel
- BLADES:** Adjustable blades are 16-GA galvanized steel
Stationary blades are 18-GA galvanized steel
- FACE OF LOUVER:** Full width sill with drain head with blades contained within the jambs
- LINKAGE:** Brackets are 12-GA zinc plated steel, pivots are .050" dia. machined steel. Zinc plated pivots rotate in a Celcon bearing. A .312 dia. aluminum linkage rod is locked to the pivot by a 1/4 - 20 set screw with an epoxy locking patch.
- SEALS:** Dual Durometer Vinyl-Grip seals at blade edge, neoprene at jambs
- SHAFT:** 1/2" dia. plated steel stub
- SCREEN:** Secured to the exterior
1/2" Sq. mesh 19 ga. galvanized steel (.041")
19-GA galvanized steel .041
- FINISH:** Mill

OPTIONS



- Frame and blades of other gauges
- Neoprene blade edge seals
- Other material (Stainless Steel, Copper, Aluminum etc.)
- Finishes: Baked powder, Epoxies, etc.
- Assorted Bird and Insect Screens
- Electric Actuators

NOTES


1. "A" width and "B" height are opening dimensions. Louvers are provided approximately 1/2" undercut.
2. Shipping weight approximately 9.0 lbs./sq.ft.

LOUVER SIZES

Panels	Min Panel	Max Single Panel
S735C	12"W x 19"H	48"W x 96"H

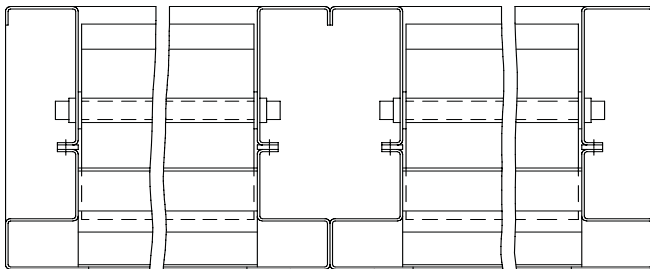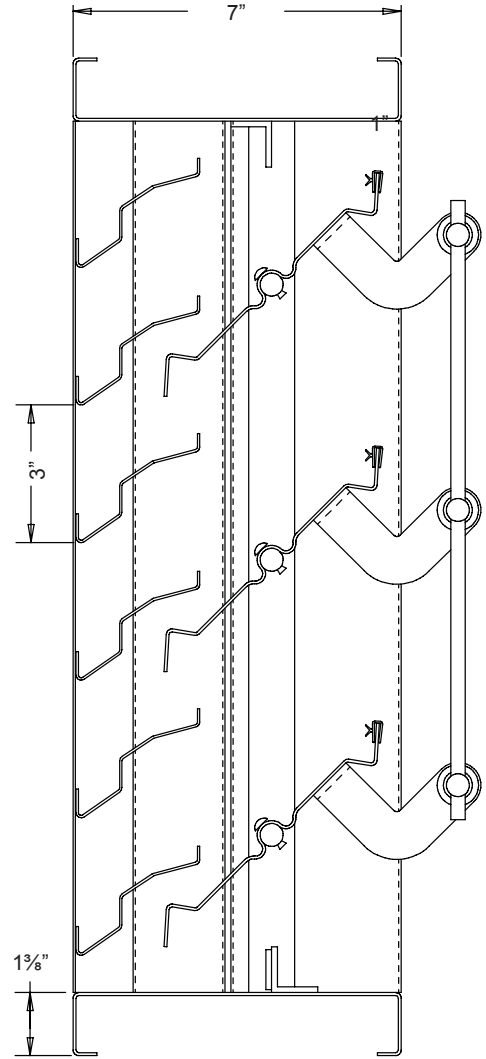

Mullion (typ.)

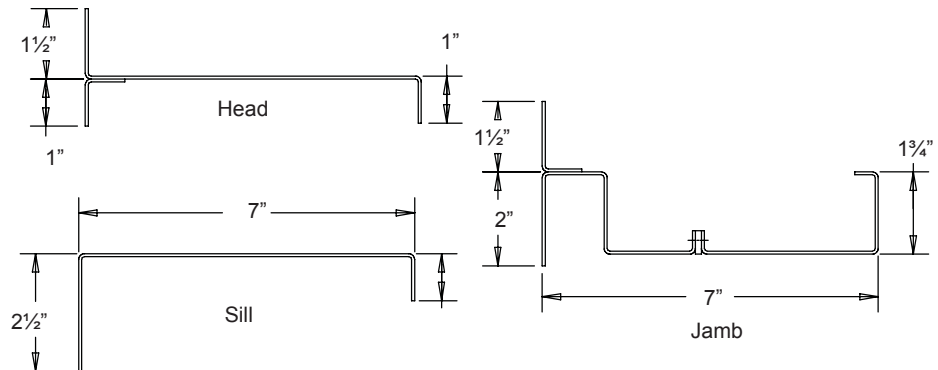

Dampers Louvers
UL Life Safety Products
Division of Mestek
Member of AMCA

MODEL S735C

7" Deep • Drainable Blade • Combination Stationary & Adjustable • Formed Steel Louver

This page intentionally left blank.