

MODEL S430

4" Deep • 30° Non-Drainable Blade • Formed Steel Stationary Louver

STANDARD MATERIALS AND CONSTRUCTION

FRAME: 18-GA galvanized steel channel type

BLADES: 18-GA galvanized steel

BLADE SPACING: 3"

ASSEMBLY: Riveted and/or welded for maximum service; Full jambs with blades, head and sill contained within

FINISH: Mill

SCREEN: ½" sq. mesh 19-GA galvanized

OPTIONS

Flange Frame

Extended Sub-Sills (3" or 5")

Sub-Frame

Installation Angles

Stainless Steel, Other Steel Gauges

Finishes - Baked Enamel, Epoxies

Variety of Bird and Insect Screens


Blank-Off Panels

NOTES


1. "A" width and "B" height are opening dimensions. Louvers are provided approximately ½" undersize.
2. Approximate louver weight is 10 lbs./sq.ft.

LOUVER SIZE


Panels	Minimum Panel	Maximum Panel
S430	12"W x 12"H	60"W x 96"H

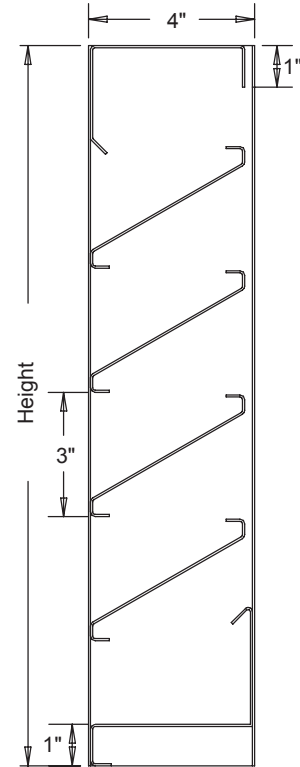


Section View




Head



Jamb

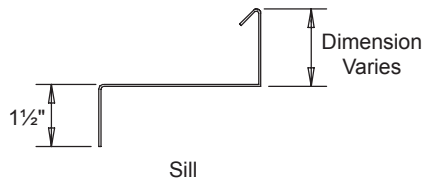

Sill

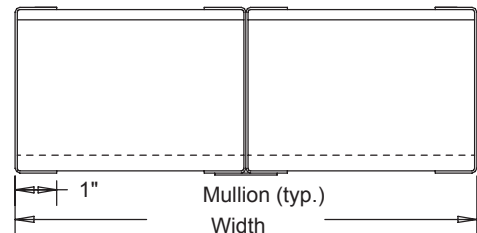

Top View

MODEL S430

4" Deep • 30° Non-Drainable Blade • Formed Steel Stationary Louver

This page intentionally left blank.