

MODEL S655

6" Deep • 45° Non-Drainable Blade • Formed Steel Stationary Louver

STANDARD MATERIALS AND CONSTRUCTION

- FRAME:** 18-GA galvanized steel channel type
- BLADES:** 18-GA galvanized steel
- ASSEMBLY:** Riveted and/or welded; Full jambs with blades, head and sill contained within
- FINISH:** Mill
- SCREEN:** ½" sq. mesh 19-GA galvanized

OPTIONS


- Flange Frame
- Extended Sub-Sills (3" or 5")
- Sub-Frame
- Installation Angles
- Stainless Steel, Other Steel Gauges
- Finishes - Baked Enamel, Epoxies
- Variety of Bird and Insect Screens
- Blank-Off Panels

NOTES


1. "A" width and "B" height are opening dimensions. Louvers are provided approximately ½" undersize.
2. Approximate louver weight is 8½ lbs./sq.ft.

LOUVER SIZE

Panels	Minimum Panel	Maximum Panel
S655	12"W x 12"H	60"W x 96"H

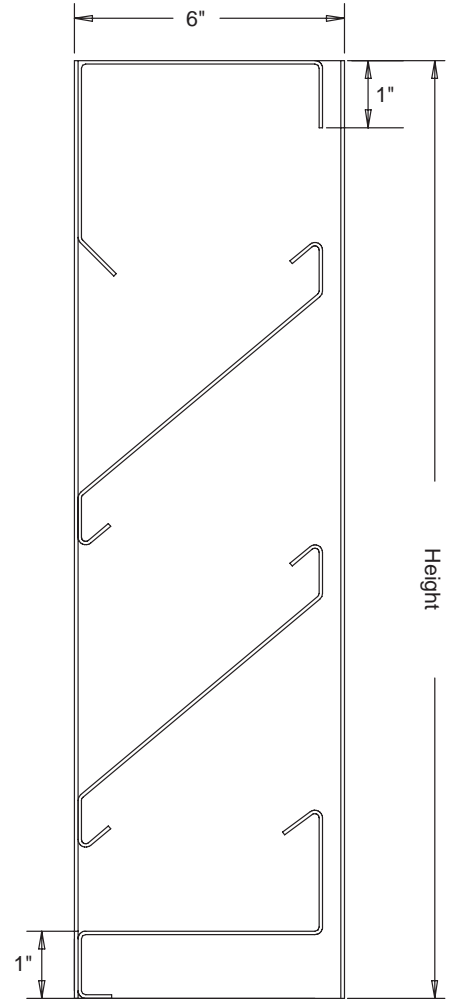


Section View

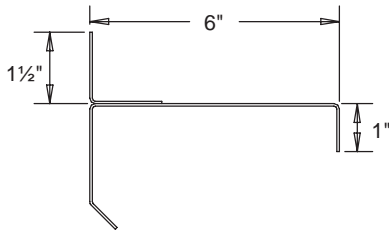


Head



Jamb

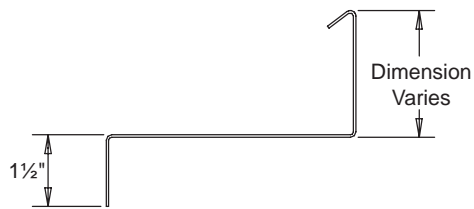

Sill

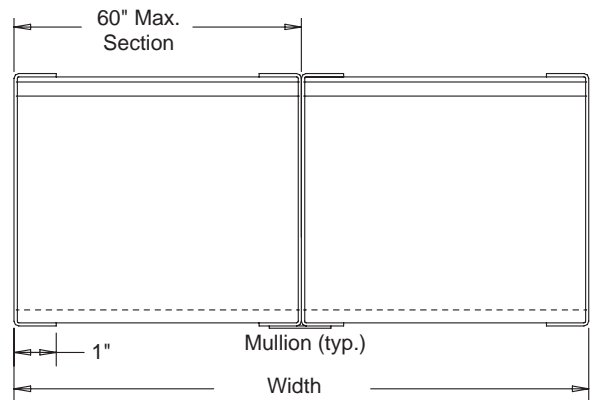

Top View

MODEL S655

6" Deep • 45° Non-Drainable Blade • Formed Steel Stationary Louver

Eatings do not nclude the effect of birdscreen.

Free Area sq.ft.

		Width								
		12	18	24	30	36	42	48	54	60
Height	12	.19	.31	.42	.53	.65	.76	.88	.99	1.11
	24	.56	.89	1.23	1.56	1.90	2.23	2.57	2.90	3.24
	36	1.05	1.68	2.31	2.94	3.56	4.19	4.82	5.45	6.08
	48	1.61	2.58	3.54	4.51	5.48	6.44	7.41	8.38	9.34
	60	2.17	3.48	4.78	6.09	7.39	8.69	10.00	11.30	12.61
	72	2.71	4.33	5.95	7.58	9.20	10.83	12.45	14.08	15.70
	84	3.17	5.08	6.98	8.89	10.79	12.69	14.60	16.50	18.40
	96	3.54	5.67	7.80	9.92	12.05	14.18	16.30	18.43	20.56