

MODEL BS50

Aluminum Blades • 200°F Max. Temperature • Vertical or Horizontal Mount • Backdraft Damper

STANDARD MATERIALS AND CONSTRUCTION

- FRAME:** 20-GA galvanized rolled frame
- BLADE:** .35" aluminum blades
- AXLE PINS:** Zinc plated with push on retainer clips
- STOP ANGLES:** 20-GA galvanized
- BLADE STIFFENER:** 20-GA galvanized
- SEALS:** Self adhesive .125" x .375" foam
- FINISH:** Mill

NOTES



1. Damper frames are provided approximately 1/4" undersized.
2. Dampers are for vertical mount, horizontal airflow; horizontal mount, vertical up or down airflow.

DESIGN CRITERIA


- MAX VELOCITY:** 1000 fpm
- MAX DIFF PRESSURE:** 1 in.wg
- MAX TEMPERATURE:** 200°F

DAMPER SIZES

Panels	Min Panel	Max Panel
Drop-In Frame	5" dia.	24" dia.
Size Chart		
Size	Actual Frame Diameter	Frame Depth
5"	4.87"	7.5"
6"	5.87"	7.5"
7"	6.87"	7.5"
8"	7.87"	7.5"
9"	8.87"	7.5"
10"	9.87"	7.5"
11"	10.87"	7.5"
12"	11.87"	10.5"
13"	12.87"	10.5"
14"	13.87"	10.5"
15"	14.87"	10.5"
16"	15.87"	10.5"
17"	16.87"	12.5"
18"	17.87"	12.5"
19"	18.87"	12.5"
20"	19.87"	12.5"
21"	20.87"	12.5"
22"	21.87"	12.5"
23"	22.87"	12.5"
24"	23.87"	12.5"

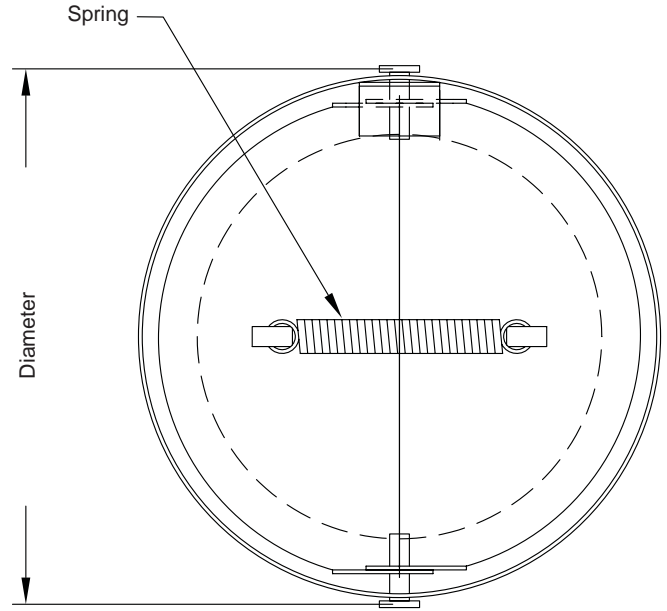

Vertical Mount

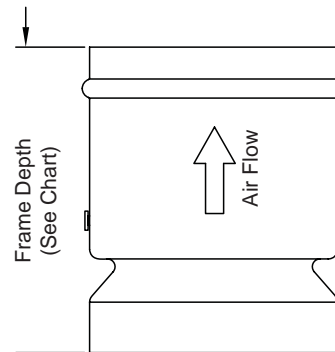

Horizontal Mount

air balance

Dampers Louvers
 UL Life Safety Products
 Division of Mestek
 Member of AMCA

MODEL BS50

Aluminum Blades • 200°F Max. Temperature • Vertical or Horizontal Mount • Backdraft Damper

This page intentionally left blank.

air balance

Dampers  Louvers
UL Life Safety Products
Division of Mestek
Member of AMCA